



TYPE 884C THERMAL PRINTER IN-LINE



884C THERMAL PRINTER

The Kwik Lok® 884C Thermal Printer is designed to preprint labels prior to application. The recommended print speed is 640 labels per minute. The printer can be configured to print faster or slower to accommodate customer print quality requirements. Recommended ribbon is 600 meters in length and capable of printing 25,000 closure-labels per roll.

The 884C will print on three label sizes: 2-3/4" x 2-3/4" (7 cm x 7 cm), 7/8" x 2-3/4" (2.22 cm x 7 cm), and 1-15/16" x 2-1/4" (4.9 cm x 5.7 cm). The 884C can print text, bar codes, and simple graphics on one side of the label, in one color. The other side can be custom printed in any number of colors, and include information such as brand name and logo.

After the labels are printed they can be applied by hand or run through a Kwik Lok® automatic or semiautomatic bag closing machine.

Label design and printing software is required for printing with the 884C. Typically this software is installed on a Windows compatible computer. "BarTender® UltraLite" label printing software by Seagull Scientific is provided with the printer for no additional charge. The printer has, as standard, USB and ethernet ports.

AUTOMATIC & MANUAL LABEL RECOILERS

Automatic and manual label recoilers are available to rewind the completed labels as the strip exits the printer. Series T-220, TM-220, and CJ-220 labels must be rewound twice prior to use with a bag closing machine. The 889A Automatic Recoil Machine has an optional label recoiling kit designed to rapidly complete the additional rewind process. Series P-200 and PM-200 need only be rewound once.

PRINTER APPROXIMATE SHIPPING WEIGHT AND DIMENSIONS

30.5" x 24.5" x 19.5"; 50 lbs.; 8.4 cu. ft.
77.5 cm x 62.2 cm x 49.5 cm; 22.7 kg; 0.3 m³

PRINTER ORDERING INFORMATION

- A. TYPE: 884C
- B. MODEL: A
- C. SPECIFY CLOSURE-LABEL: Indicate closure-label to be used on initial printer set-up, including hand (right hand or left hand). This information determines the closure-label reel supplied with the printer.

EXAMPLE ORDER:

Type 884C Model A printing on left hand PM-200 closure-label.

PRINTER OPTIONS:

- P38-00018 BarTender® software "basic" edition
- Z8084011 Manual Recoiler
- Z8084029 Print Stand
- 08-005429 Extra Label Cassette: PM-200/TM-220
- 08-005386 Extra Label Cassette: P200/T220
- P11-00700 USB Cable
- P18-00114 Black Printing Foil
- P18-00088 Printer Cleaning Pen
- 889A Automatic Label Recoiler (see next page for separate ordering information)
- 888A Label Separator (see next page for separate ordering information)



SPECIFICATION CHART

TYPE	MODEL	LABEL HAND	CLOSURE LABEL	VOLTAGE
884C	A	R or L	PM-200	100-240VAC, 50/60Hz, 1.6-0.7A, 1PH
		L only	P-100	
		R or L	P-200	
		R only	T-210	
		R or L	T-220	
		R or L	TM-220	
		R or L	CJ-220	



TYPE 884C THERMAL PRINTER IN-LINE



889A LABEL RECOILER AND PRINT STAND
(Part No. Z8084029)

APPROXIMATE SHIPPING WEIGHT AND DIMENSIONS

51" x 24" x 62"; 215 lbs.; 44 cu. ft.
130 cm x 61 cm x 158 cm; 98 kg; 1.25 m³



888A LABEL SEPARATOR

The unit separates the individual labels from the roll, placing them into a carton. The separator operates at 384 labels per minute. It utilizes Series P-100, and P-200 in left hand only and T-210 in right hand only.

APPROXIMATE SHIPPING WEIGHT AND DIMENSIONS

29" x 36" x 48"; 173 lbs.; 29 cu. ft..
73.6 cm x 91.4 cm x 121.9 cm; 78.4 kg; 1 m³

ORDERING INFORMATION

- A. TYPE: 889A
- B. MODEL: A
- C. SPECIFY TRACK AND LABEL CASSETTE:
 - 1. Kit P-200/T-220 Track & Label Cassette
 - 2. Kit PM-200/TM-220 Track & Label Cassette
- C. SPECIFY ELECTRICAL REQUIREMENTS:
 - 1. 115VAC, 50/60 Hz, 1.5A, 1 Ph
 - 2. 230VAC, 50/60 Hz, 1.5A, 1 Ph

Example Order: Type 889A Model A, P-200/T-220 Track & Label Cassette, 115VAC, 60 Hz.

ORDERING INFORMATION

- A. Type 888A
- B. Model:
 - 1. AP For use with Series P-100, P-200, and T-210 closure-labels.
 - 2. APM For use with Series PM-200 closure-labels.
- C. SPECIFY ELECTRICAL REQUIREMENTS:
 - 1. 115VAC, 60 Hz, 1A, 1 Ph
 - 2. 230VAC, 50 Hz, 1A, 1 Ph

Example Order: Type 888A Model AP, 115 AC, 60 Hz

889A RECOILER OPTIONS

- Z8089004 Kit: P-200/T-220 Track & Label Cassette
- Z8089006 Kit: PM-220/TM-220 Track & Label Cassette
- Z8089005 Kit: T-220 Label Recoiling
- Z8089007 Kit: TM-220 Label Recoiling
- 08-005429 Extra Label Cassette: PM-200/TM-220
- 08-005386 Extra Label Cassette: P-200/T-220



MANUAL RECOILER
Part Number Z8084011

APPROXIMATE SHIPPING WEIGHT: 8 lbs. - 3.62 kg

MANUAL RECOILER OPTIONS


- Z80840111 Extra Label Cassette: P-200/T-220
- Z80840112 Extra Label Cassette: PM-200/TM-220




TYPE 884C THERMAL PRINTER IN-LINE

PRINT AREA SPECIFICATIONS


The printable areas defined here represent the maximum allowable print areas for each style of closure-label.

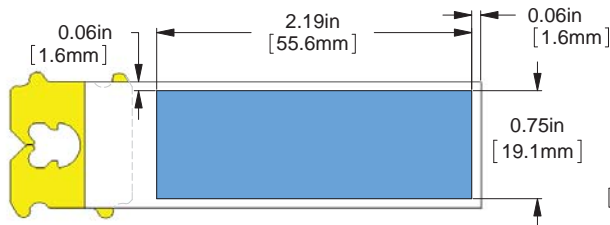


Series P-100 and P-200
Closure-Label

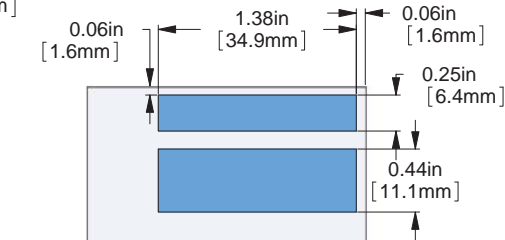

Series CJ-220
Closure-Label

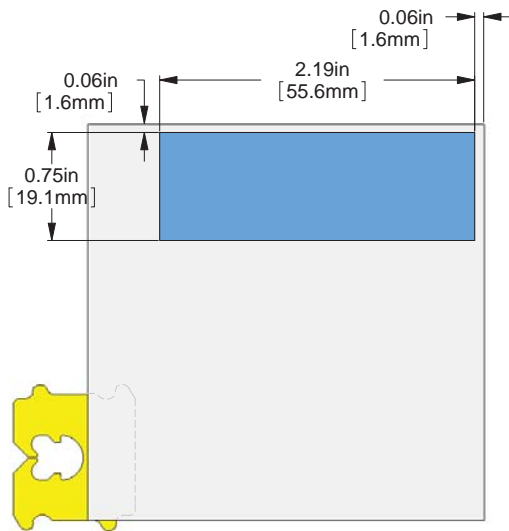

Series T-210 and T-220
Closure-Label

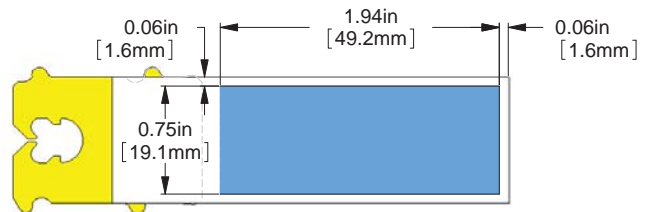


Series PM-200
Closure - Label



BarTender® Ultralight label design and printing software provided with the purchase of an 884C Printer, at no additional charge.

NOTE: For best results, printing should be done on the clay coated surface of the tagboard label.

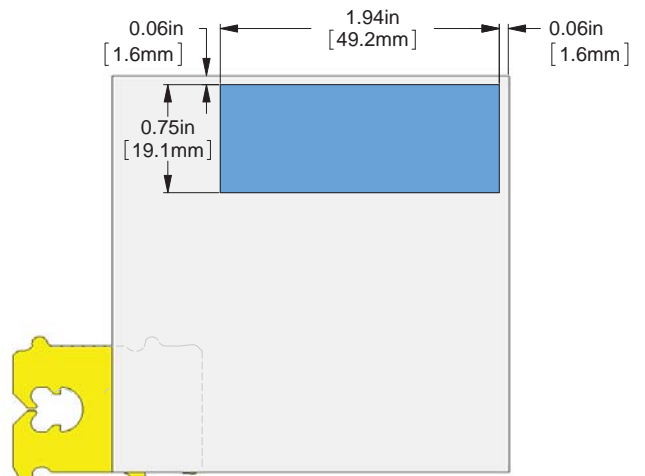

Series TM-220
Closure-Label